

advantay


www.advantay.co.uk

P-PLUS - INSULATED BUFFER TANKS

Class B & C rated for energy efficiency and specifically designed for use with renewable energy heat source to provide a stored volume of heated water.

Fully insulated carbon steel buffer tanks with multi port to provide ease of installation.

Flow and return ports mounted at 90deg for ease of installation.

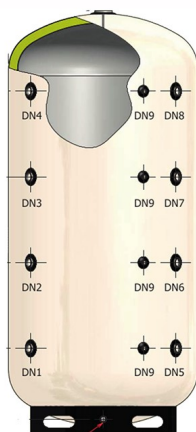

SPECIFICATIONS:

Class B Rated 100ltr & 200ltr

Class C rated 300ltr up to 5000ltr

6 x flow / return 200ltr

8 x flow / return 300ltr to 5000ltr

Floor Standing

Carbon Steel

Fully Insulated

Max Pressure 10bar - 100ltr/200ltr/300ltr

Max Pressure 8bar - 500ltr to 1000ltr

Max Pressure 3bar - 1500ltr to 5000ltr


Min °c -10°c

Max °c +95°c

Must be used with a suitable inhibitor

P-PLUS Buffer Tanks


Code	Size	Flow/Ret	Top Port	Drain Port	Sensor Port	Aux Port	Height	O/D
P-PLUS 200	200ltr	1-1/2" F x 6	1-1/4" F	-	1/2" BSP F x 3	-	1200mm	610mm
P-PLUS 300	300ltr	1-1/2" F x 8	1-1/4" F	-	1/2" BSP F x 4	-	1670mm	650mm
P-PLUS 500	500ltr	1-1/2" F x 8	1-1/4" F	-	1/2" BSP F x 4	-	1735mm	760mm
P-PLUS 600	600ltr	1-1/2" F x 8	1-1/4" F	-	1/2" BSP F x 4	-	1930mm	760mm
P-PLUS 800	800ltr	1-1/2" F x 6	1-1/2" F	-	1/2" BSP F x 4	-	1815mm	940mm
P-PLUS 1000	1000ltr	1-1/2" F x 8	1-1/2" F	-	1/2" BSP F x 4	-	2065mm	940mm
P-PLUS 1500	1500ltr	1-1/2" F x 8	3" F	1" F	1/2" BSP F x 4	-	2440mm	1270mm
P-PLUS 2000	2000ltr	1-1/2" F x 8	3" F	1" F	1/2" BSP F x 4	-	2470mm	1370mm
P-PLUS 3000	3000ltr	2" F x 8	3" F	1" F	1/2" BSP F x 4	-	2770mm	1350mm
P-PLUS 5000	5000ltr	2" F x 8	3" F	1" F	1/2" BSP F x 4	-	2945mm	1700mm

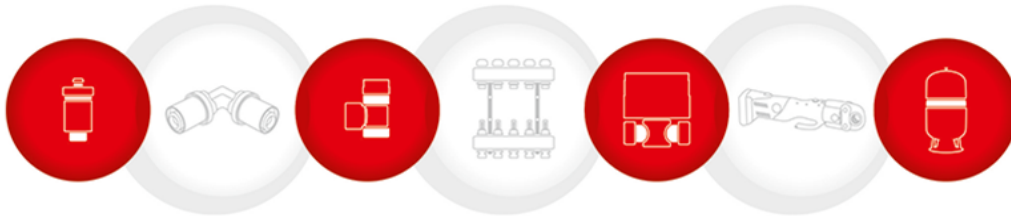


advantay

www.advantay.co.uk


P-PLUS 200

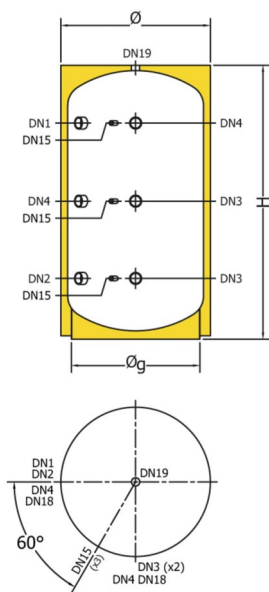

P-PLUS 300 - 1000

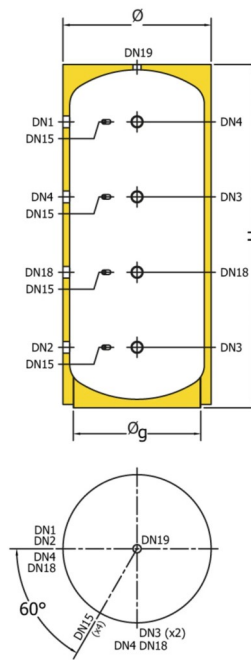

P-PLUS 1500 - 2000

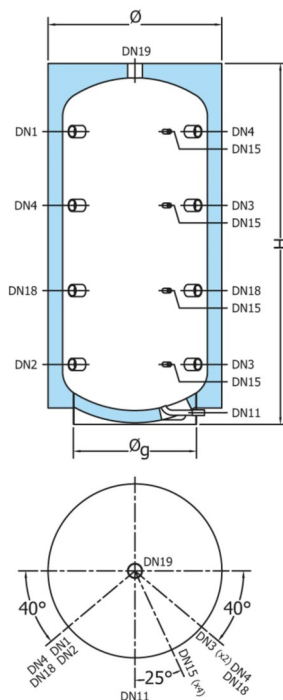

P-PLUS 3000 - 5000

